

# Springloaded Back-Pressure Regulator

Model – GBT15S-420

## Description



The GBT15S springloaded back-pressure regulator controls the supply pressure on the inlet side. When the supply pressure rises above the set pressure, the fluid starts flowing to the outlet side.

## Specifications

Inlet pressure	280 or 420 bar max.
Adjustable	0-420 bar
Connections	1/2" NPT or BSPP
Seat diameter	7 mm
Cv / Kv	Cv 0.7 / Kv 0.6

## Fluids

This back-pressure regulator is suitable for gases and liquids.

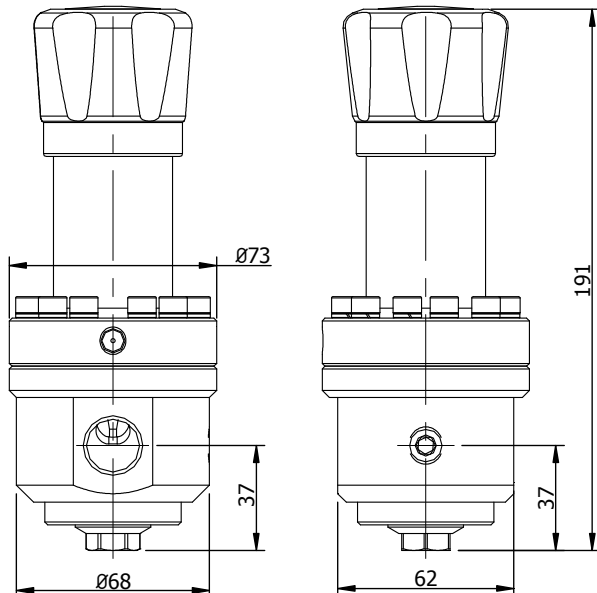

## Materials

The regulator is made out of barstock stainless steel material.

Body	ss 316L
Springhousing	ss 316L
Valve	ss 316L
Seat	rubber
Setspring	ss 302
O-rings / diaphragm	NBR, FKM or EPDM

Other materials available on request.

All metal parts are marked with a traceable batch number. Material certificates are available on request.

## Temperature

The general temperature range of the regulator is -50 / 200 °C, but could be limited due to the used sealing materials.

KEL-F seat	-15 / 60 °C
PEEK seat	-50 / 200 °C
NBR seals	-35 / 130 °C
FKM seals	-20 / 200 °C
EPDM seals	-50 / 120 °C

# Springloaded Back-Pressure Regulator

Model – GBT15S-420

## Technical details

- all regulators tested before delivery
- leak-tight seat design
- all parts cleaned and degreased
- PED classification SEP
- ATEX classification EXII 3GD

Although this regulator has a leak-tight seat, the regulator should not be used as a shutt-off valve.

Spare parts kits are available for the regulator.

## Dependency

A character of the regulator is "dependency". The set-pressure will change, when you have a changing outletpressure.

- range 0-3 bar - 1:30
- range 0-8 bar - 1:30
- range 0-20 bar - 1:30
- range 0-50 bar - 1:10
- range 0-100 bar - 1:35
- range 0-280 bar - 1:12
- range 0-420 bar - 1:9

## Adjusting the regulator

The regulator comes standard with a knob. The threadpiece below the knob is designed for frequent adjustment.



## Options

Dutch Regulators supplies the regulators to your needs. When you have the need for special features or options, Dutch Regulators is the right address.

### Standard options

- gauge ports
- locking cap or an adjustment knob

### Special options

- other seal materials on request
- other body materials on request
- material according to NACE MR0175

## Flow

The regulator has good flow performance over the complete range. Always ask Dutch Regulators for advice, if this regulator is the best choice for your application.

Regulators that have a fixed setpoint, can be equipped with a locking cap.



# Springloaded Back-Pressure Regulator

Model – GBT15S-420

## Section view

The section view of the regulator gives an idea of the internals of the regulator.



- diaphragm sensing up to 20 bar
- unbalanced valve construction up to 20 bar
- piston sensing with from 50 bar and higher
- balanced valve construction from 50 bar and higher

## Gaugeports


The regulator has standard one 1/4" NPT gaugeport to measure the controlled setpressure.

Option G1 and G2 are optional 1/4" NPT gaugeports, see for the position the pictures below.

On request it is possible to have other gaugeports.

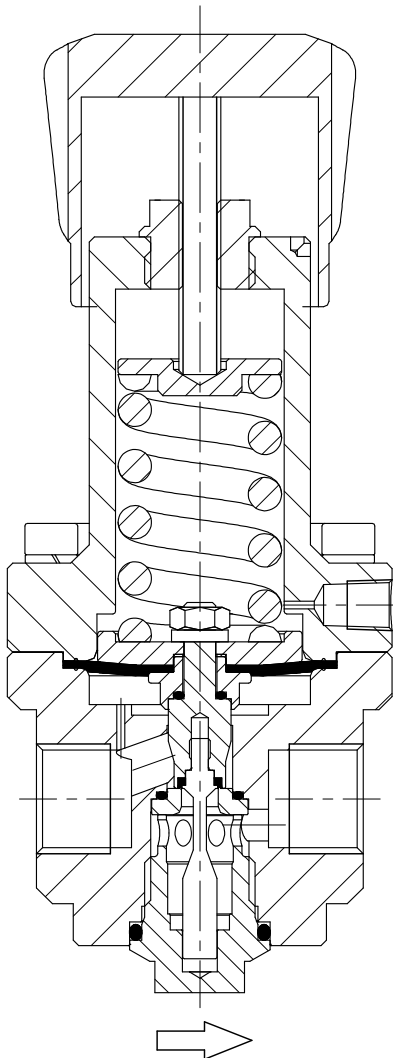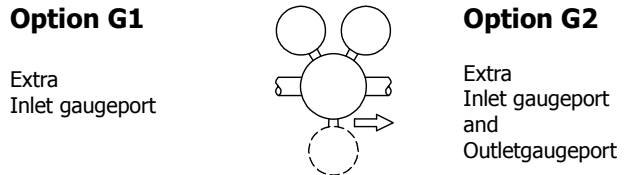

Section view of:  
GBT15S-280N20-SSNN

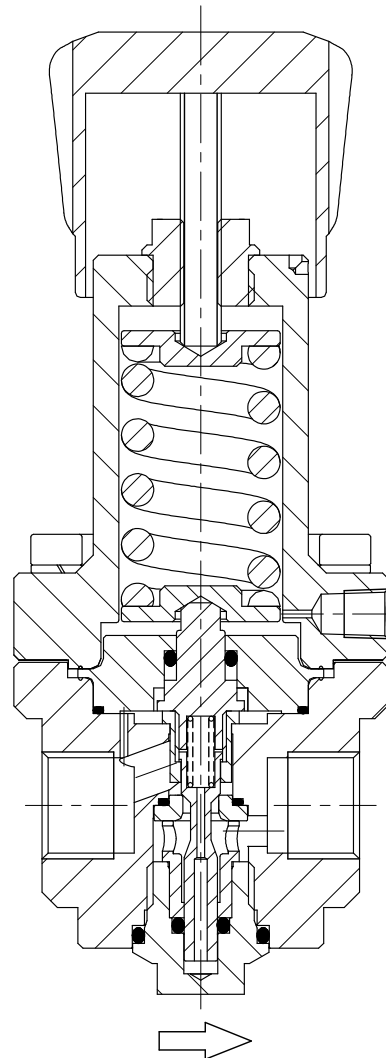

Section view of:  
GBT15S-420N280-SSPV

# Springloaded Back-Pressure Regulator

Model – GBT15S-420

## Mounting holes

The bottom of the regulator has two mounting holes M5 with 8 mm thread and a C-C distance of 35 mm.



## Design pressures

The regulator has a design pressure of 280 or 420 bar, where the design pressure applies for the inlet and outleside.

Depending on temperature or special wishes, the design pressure on the regulator could be different.

The design pressure comes standard together with specific seat materials.

- 50 bar - NBR, FKM or EPDM
- 280 bar - Kel-f
- 420 bar - PEEK

## Typenumber explanation

Example : GBT15S - 420N280 – SSPV

model	design pressure	connections	adjustable	material	seat	seals	options
<b>GBT15S</b>	<b>280</b> : 280 bar	<b>N</b> : 1/2" NPT	<b>3</b> : 0-3 bar	<b>SS</b> SS 316L	<b>N</b> nitrile	<b>N</b> nitrile	<b>G1</b> one extra gaugeport
	<b>420</b> : 420 bar	<b>B</b> : 1/2" BSPP	<b>8</b> : 0-8 bar		<b>V</b> viton	<b>V</b> viton	<b>G2</b> two extra gaugeports
			<b>20</b> : 0-20 bar		<b>F</b> FKM	<b>F</b> FKM	
			<b>50</b> : 0-50 bar		<b>E</b> EPDM	<b>E</b> EPDM	<b>L</b> locking cap
			<b>100</b> : 0-100 bar		<b>K</b> kel-f		
			<b>280</b> : 0-280 bar		<b>P</b> PCTFE		<b>xxx</b> codes for special option
			<b>420</b> : 0-420 bar				

All regulators are marked with an ID number, the exact configuration of the regulator is stored in this ID number. Always mention the ID number in case you need spare parts.